CTPR3000

TOUCHSCREEN REPEATER PANEL INSTALLATION MANUAL

COOPER Fire

Introduction

Introduction to the Manual

This manual provides information on the installation, operation and maintenance of the Panel System.

NOTICE

The operating system of the panel may be revised as a result of enhancements to the system software or hardware. Revisions to this manual will be issued and supplied on request and should be logged in the table supplied on the contents page.

COOPER Fire

Contents   **Page**

Contents

Contents

COOPER Fire

Contents

Contents	**Page**

COOPER Fire

Section 1

System Installation and Design

Introduction

Analogue Touchscreen Repeater Panel CTPR3000

The CTPR3000 fire detection repeater panel provides sophisticated 'touch screen' functionality yet achieves a simple end-user interface operation within a compact panel design. The CTPR3000 is designed to work with Cooper Analogue Addressable Fire alarm Control Panels as a network repeater. It is fully compliant with the statutory requirement of EN60950 (LVD) and EN50130 (EMC) and includes an integral monitor PSU compliant with the latest requirements of EN54 pt4 together with a wide range of user controllable functions; make the panel suitable for a wide range of projects.

The Cooper repeater panel is easy to install and commission all text is transmitted via the network and is automatically updated and as the following features

• Plug and play. All information is downloading through the network

• Touch Screen Display

• Integrated Network capability allows networking with Cooper latest range of analogue addressable Fire Alarm Control Panels

• Multi language capability

• 2 programmable Auxiliary relays

• 24 Volts 500ma output

• Programmable input is available

• External Printer outputs

• Up to 1000 event log

• Optional local and external PSU

• PSU approved to EN54 pt4

• Utilises 2 core cables and up to 125 repeaters can be connected to the network

• Programmable as an active or Passive Repeater can be power locally or external 24 volts power supply

COOPER Fire

Technical Specification

Power Specification

Mains Fuse : 1.6A Slow Blow
Nominal Voltage : 230 Vac + 10%, -15%
Nominal Current : 75mA

The Panel is protected by an internal thermal device, this requires no maintenance

Batteries

Number of Batteries : 2
Manufacturer: :YSP12-7
Capacity : 7 Ah
Battery Fuse : 4A Quick Blow (F4)
Maximum battery current; : 3.5 Amps
Standby current (mA) : 100 (1 loop)

Inputs

Programmable Input (TB10)
Link input to activate

Outputs

Programable Auxiliary Relays (TB8)
The programable auxiliary relays provide fused volt free change over contacts. These contacts are not monitored.
Max Load : 24 Volts 1 Amp
Fuse (PTC4) : 1.1 Amps polyswitch

Programable Fault Relays (TB7)
The programable fault relays provide fused volt free change over contacts. These contacts are not monitored.
Max Load : 24 Volts 1 Amp
Fuse (PTC3) : 1.1 Amps polyswitch

24V Input Supply (TB1)
Nominal Voltage : 24 Volts ±10%
Fuse (PTC1) : 1.1 Amps polyswitch
Maximum current : 800 mA
Any power taken from the alarm system will effect the standby duration

24V Output Supply (TB2)
Nominal Voltage : 24 Volts ±10%
Fuse (PTC2) : 1.1 Amps polyswitch
Maximum current : 500 mA

COOPER Fire

Technical Specification

Mechanical Specification

Weight including batteries : 9 Kg
Weight excluding batteries : 4 Kg
Dimensions (Standard batteries) : 395mm(L) x 270mm(H) x 115mm(D)
Type of Material (backbox) : Mild Steel (Power Coated)
Type of Material (Facia) : PC/ABS
Flammability Rating : UL 94 V0
Total Number of knockouts : 11
Diameter of Knock out : 20mm

TERMINAL BLOCKS : DO NOT USE EXCESSIVE FORCE WHEN TIGHTENING THE SCREWS ON THE TERMINAL BLOCK

Cable & Wiring

Only the cable types listed below are allowable for loop connections.

DRAKA Cables (Part Number 910234)
Technical Specification

Cabling Application		Applicable Standards	
Circuit integrity Structured Wiring		ISO/IEC 11801:95	
Alarm/Lighting Cable Part Number 910234		EN 50173:95	
Patent Protected Design		Fire Propagation Test : UL 1581 VW1;	
		IEC60332.3;	
		Cct Integrity tests: IEC 60331; BS5839: 2002	

Cable construction			
Conductor	**Bare Cu**	Outside Diameter of Conductor	**0.65 mm**
Insulator Material	**Wire**	Outside Diameter of Insulation	**1.70 mm**
Number of Twisted Pairs	**PE/Sil Rbr**	Outside Diameter of Sheath	**5.3 mm**
Glass Tape	**1**	Weight OHLS	**15.8 kg/km**
Screen Material	**Mica**	Sheath Colour (OEM Specified)	**Various**
Braid	**Ali/Mylar**	Sheath Printing (up to 24	**Batch No. &**
Sheath Material	**TCWB**	characters)	**Metre marking**
	OHLS		

Cable Properties		Electrical Characteristics @ 20 ºC	
Min. Installation Bend Radius	**8 x Dia**	Return Loss RI	**>IEC dB**
Min. Installed Bending Radius	**4 x Dia**	Characteristic impedance @	**100±5Ω**
Max. Installation Tension	**50N**	10MHz	**30 Ω/100m**
Max. Installed Tension	**Zero**	DC Conductor Loop Resistance	**?2%**
InstTemp. Range Installed	**0 to 0ºC**	Max. Resistance unbalance	**57%**
Operating Temp. Range	**-20 to 60ºC**	Nominal Velocity of Propagation	**?5000**
		Insulation Resistance (500V)	**MΩ.km**
		300/500v rated	

Fire tests BS 5839: 2002 & IEC60331	
Continued Data Operation @ 950	**>3 Hours**
Smoke test	**passed**
Approvals	**passed**

When choosing your preferred cable type, you must take note of the following cable and wiring requirements.

1. The cable must be 2 core screened with an over sheath.
2. Maximum loop length with any of the above cables is 1KM
3. Multicore cable should not be used for detector wiring.
4. The screen or drain wire of the network cable should not be considered as a safety earth.
5. Screen continuity must be maintained throughout the entire network circuit including at each junction point.
6. Where the network cable passes between buildings, screen continuity should not be maintained from building to building. A booster device must however be used irrespective of cable length and should be fitted at a suitable point in the link between buildings. The cable screen should be connected to the earth of one panel in each building.

COOPER Fire

Installation

The panel should be installed in a clean, dry, reasonably well ventilated place, and not in direct sunlight. Temperatures in excess of +45°C and below -10°C may cause problems, if in doubt consult Technical Support. The panel should be located away from any potential hazard, in a position where it is readily accessible to authorised staff, and the fire services, ideally on the perimeter of a building near a permanent entrance. Mount the panel to the wall using the drill template provided. Do not drill through the panel to the wall as dust will contaminate the circuitry.

Installation Guide

- Never carry out insulation tests on cables connected to electronic equipment.
- DO NOT OVER TIGHTEN TERMINAL CONNECTOR SCREWS
- Always use the correct type of cables specifically designed for the operation of fire detection and alarm circuits.
- Always adhere to volt drop limitation when sizing cables
- Always observe polarity throughout. Non colour coded conductors should be permanently identified.
- Screen continuity must be maintained throughout the entire network.
- The screen should be earthed at the connection point provided at the Panel and not at any other point.
  Care must be taken to avoid connecting the screen to the earthed body of any metal devices, enclosures or cable containment. The screen or drain wire of the network cables should not be considered as safety earth and therefore should not be connected to terminals marked with the earth symbol, except at the panel, and should not be insulated with green and yellow sleeving.

COOPER Fire

Fixing details

Read all the installation instructions before commencing with the installation. The installation of this panel must be carried out by a suitably qualified /trained person. The installation must comply with IEE wiring regulations and with BS5839 part 1 2002

The electronic components within the fire panel are Static Sensitive. Do not touch the electronics directly.

Mounting the Backbox

The Panel can be surface mounted and recessed . To surface mount; drill three holes and fix the backbox to the wall using suitable screw fixings.

All Dimensions in MM

270.00
141.80
128.20
229.80
345.00
50.00
325.00
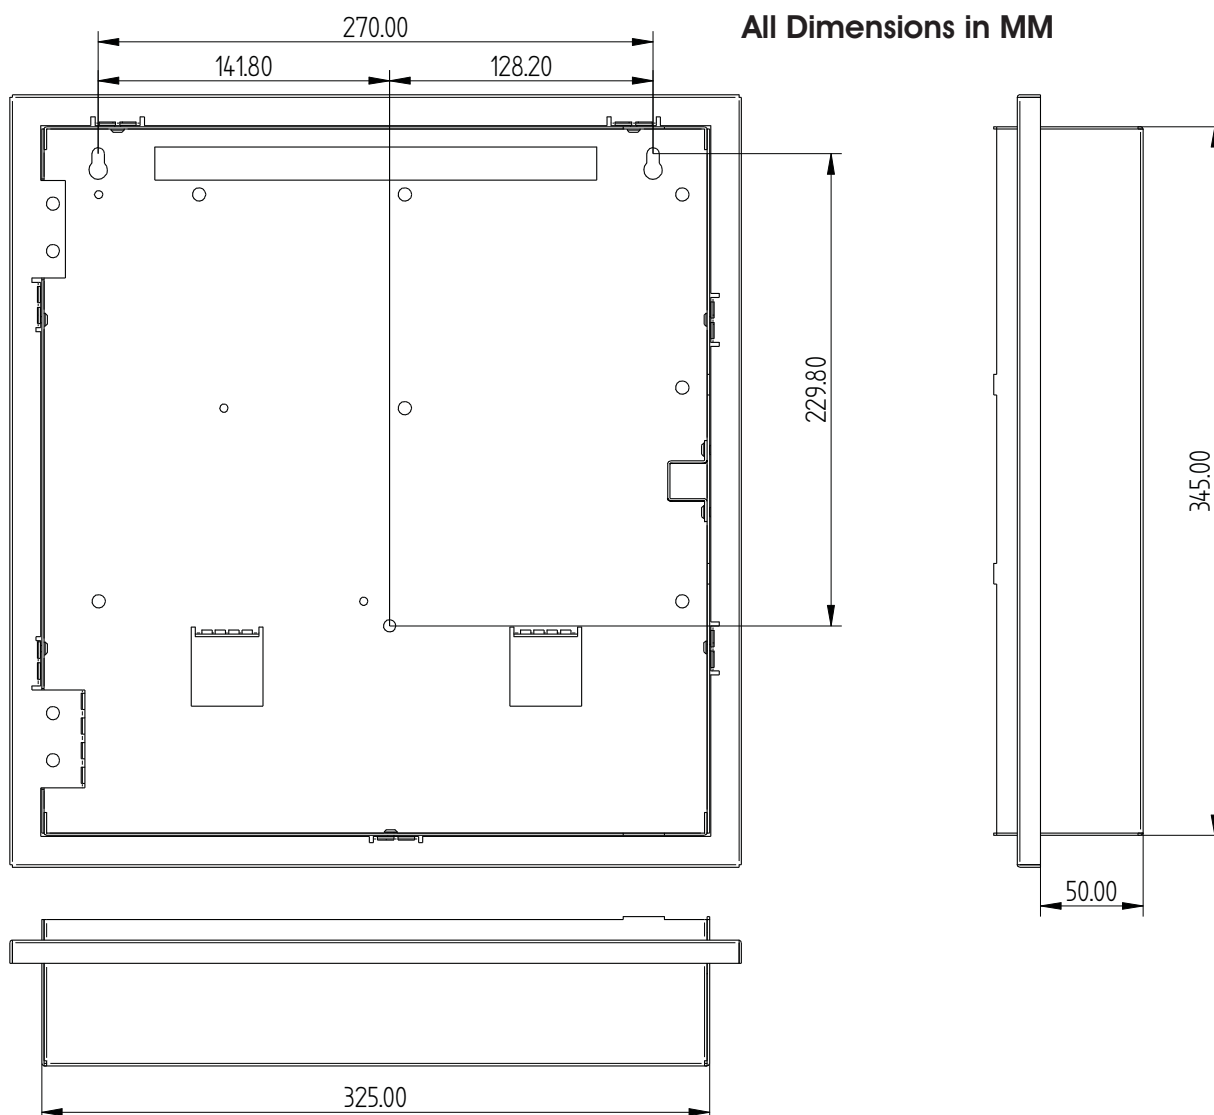
Installing Cabling

Once the backbox is mounted the next stage is to install the power and loop cables and fit the glands.

COOPER Fire

External Connections

Mains Supply

The mains supply should be installed in accordance with the current edition of the IEE wiring regulations. Connection to the mains supply must be via an isolating device (e.g. an isolating fuse) reserved solely for the fire alarm system. The cover should be coloured red and labelled "FIRE ALARM - DO NOT SWITCH OFF". The isolating protective device should be secure from unauthorised operation and ideally installed in a securely closed box with a breakable cover.

An additional warning label should be provided, depending on whether:-

a) The isolating protective device is fed from the live side of the main isolating device in which case the label on the isolating protective device, should read in addition - "WARNING: THIS SUPPLY REMAINS ALIVE WHEN THE MAIN SWITCH IS TURNED OFF". A further label should be placed on the main isolating device reading "WARNING: THE FIRE ALARM SUPPLY REMAINS LIVE WHEN THIS SWITCH IS TURNED OFF.

Or

b) If the isolating protective device is fed from the dead side of the main isolating device, a label should be fixed to the main isolating device reading "WARNING: THIS SWITCH ALSO CONTROLS THE SUPPLY TO THE FIRE ALARM SYSTEM".

Distributed Power Supplies

The above also applies to any distributed power supply (i.e. mains connections for Repeater Panels , Sounders Controller Units, etc.)

Networking

Up to One Hundred & Twenty Six Panels or repeaters can be networked together to operate as a single networked system. To achieve this each panel must be fitted with a network card (Optional Extra)
When operating as a networked system all fire and fault event information is displayed at every panel, silencing and resetting of alarms can also be carried out from any panel on a networked system if panels are suitably configured.

Networked panels are connected using a loop topology as illustrated.

Networked panels can be used as active repeaters, alternatively a low cost passive repeater is available.
This can either be connected a loop of an individual panel or it can be connected to the network.

The recommended network cable for the network connection between panels is an enhanced Firetuf cable Manufactured by Draka cables (part number 910234.)
Screen continuity must be maintained throughout the entire network circuit including at each junction point. The screen should only be earthed at the connection point provided at the first panel and not at any other point. The screen or drain wire of the network cable should not be considered as a safety earth and therefore should not be connected to terminals marked with the earth symbol, except at the panel, and should not be insulated with green and yellow sleeving
Where the network cable passes between buildings, screen continuity should not be maintained from building to building. A booster device must however be used irrespective of cable length and should be fitted at a suitable point in the link between buildings. The cable screen should be connected to the earth of one panel in each building. 102 Ω terminator should be fitted at the beginning and the end of the network. If the distance in the network exceeds 1KM the booster should be used. The booster requires 24V local supply, which can be connected to nearest Addressable Panel

4.1.3 Acceptable Cable length.
Based on the above cable, the maximum acceptable length between signal boosters is 1000 Metres. This distance can only be achieved when the above cable is used, Cooper lighting and security does not recommend the use of other network cables.

Once the maximum cable length has been reached, a booster must be fitted which then allows a further length of the same distance (1000 Metres for the recommended cable).
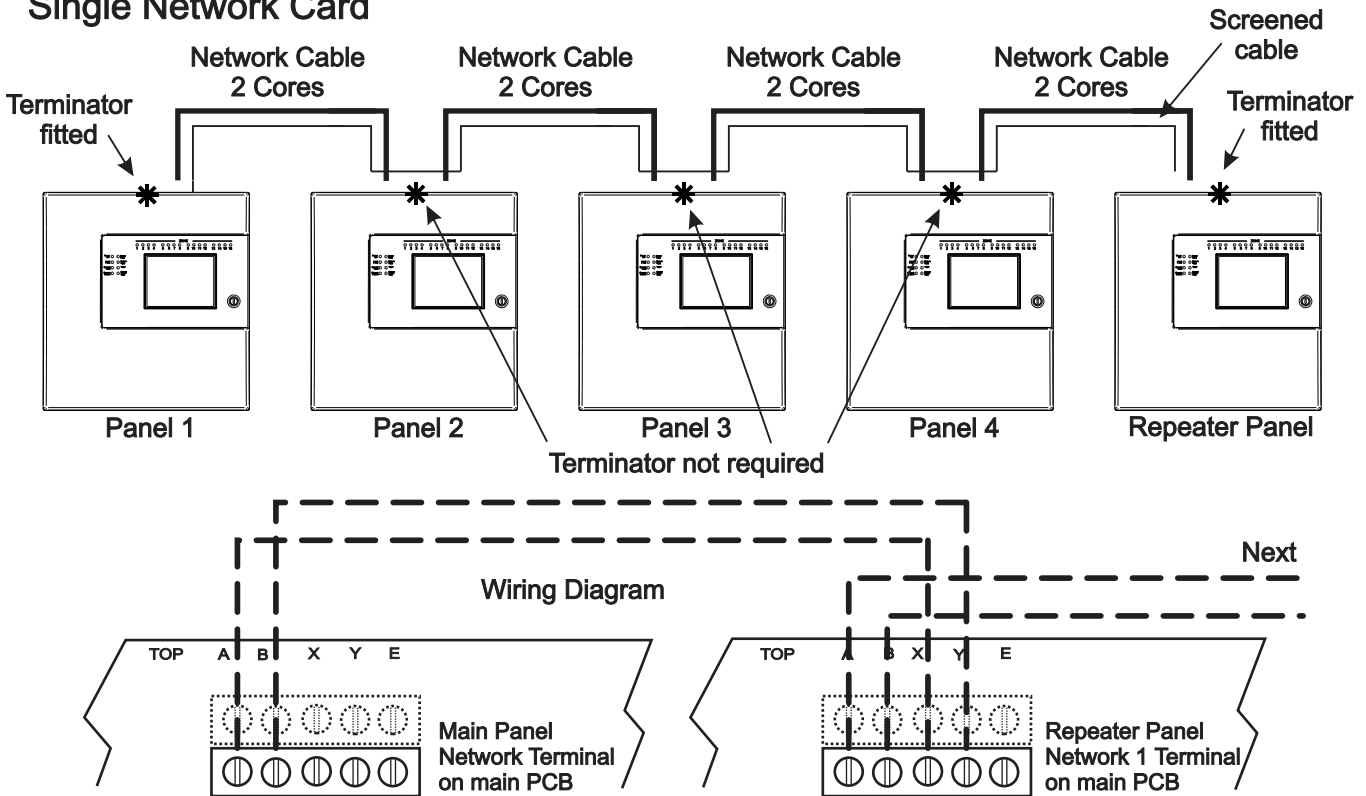A maximum of 5 network boosters can be used

N.B. Repeater control panels do not act as boosters, therefore the location of such panels is irrelevant when calculating cable lengths and the requirement for booster devices.
For convenience when using 24V boosters (see following) it may be desirable to house the booster near to an repeater control panel to derive a convenient power supply.

COOPER Fire

Networking

Please Note: Cooper Network cards are fitted with loop terminators as standard please cut if not required.

Daisy chain configuration
Single Network Card

Terminator fitted

Network Cable 2 Cores

Network Cable 2 Cores

Network Cable 2 Cores

Network Cable 2 Cores

Screened cable

Terminator fitted

Panel 1

Panel 2

Panel 3

Panel 4

Repeater Panel

Terminator not required

Next

Wiring Diagram

TOP A B X Y E

Main Panel
Network Terminal
on main PCB

TOP A B X Y E

Repeater Panel
Network 1 Terminal
on main PCB

Redundant Network

Terminator fitted

Network 1 Cable

Network 1 Cable

Network 1 Cable

Network 1 Cable

Screened cable

Network 2 Cable

Network 2 Cable

Network 2 Cable

Network 2 Cable

Terminator fitted

Panel 1

Panel 2

Panel 3

Panel 4

Repeater Panel

Terminator not required

Next

TOP A B X Y E

Main Panel
Network 1 Terminal
on main PCB

Main Panel
Network 2 Terminal
on main PCB

TOP A B X Y E

Repeater Panel
Network 1 Terminal
on main PCB

TOP A B X Y E

Repeater Panel
Network 2 Terminal
on main PCB

COOPER Fire

Section 2

Commissioning

COOPER Fire

Commissioning

The Cooper Repeater is a plug & play technology where downloading of text information through a PC is not required as the text information is downloaded via the network.

1.   Supply the network address (pagexxxxxxxxxxx)
2.   Select the repeater mode information (page xxxxxxxx)
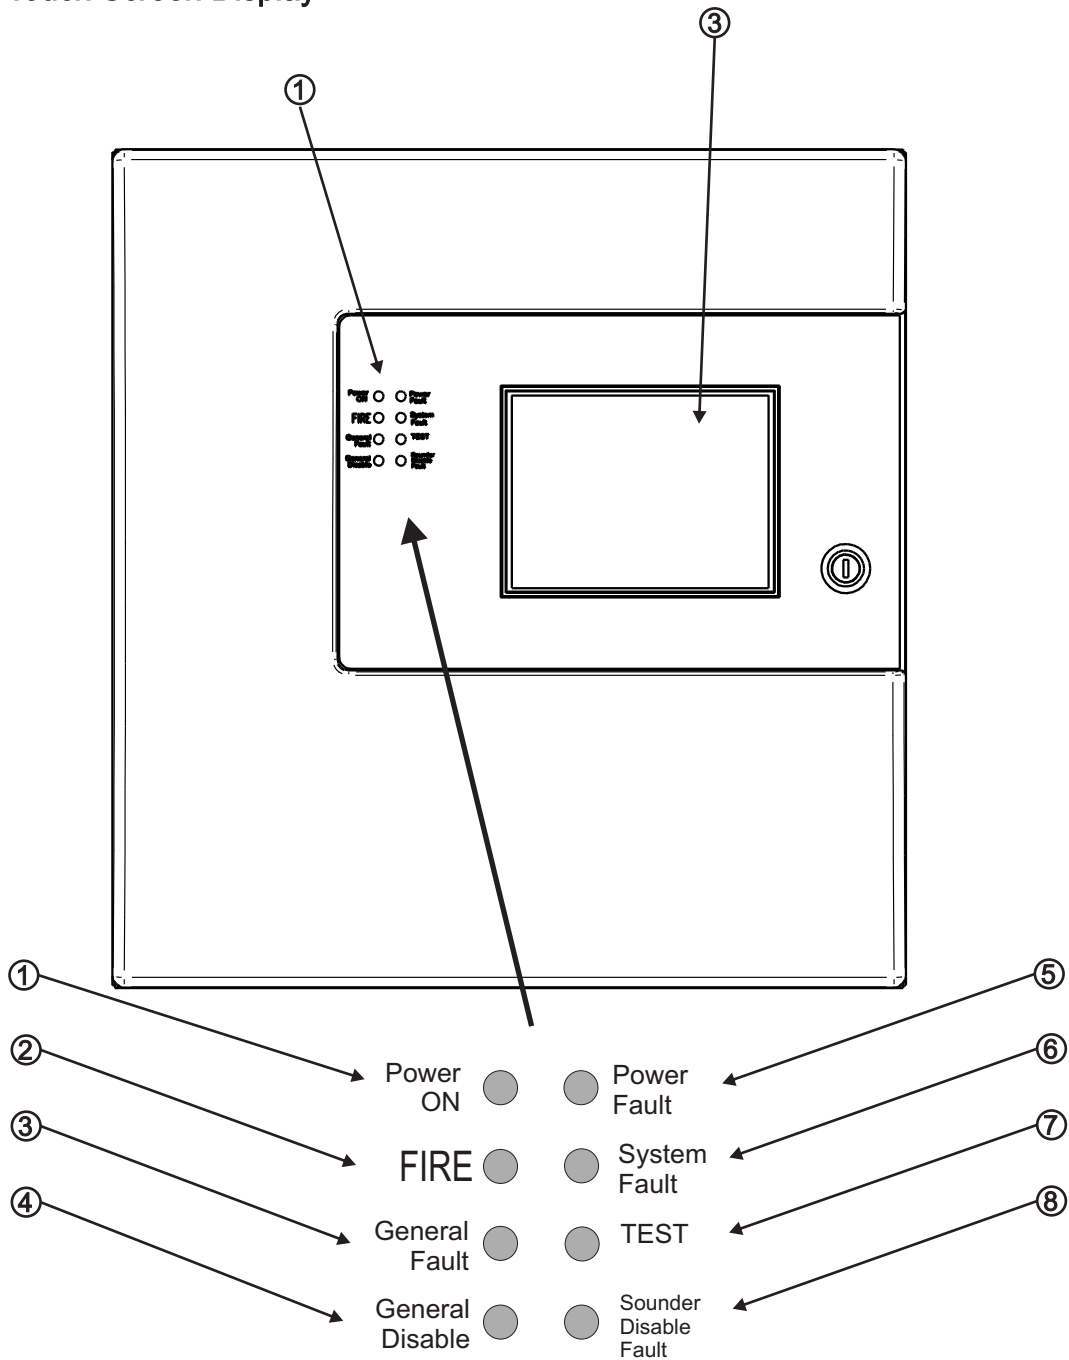3.   Program the relays output and programable input if required (page xxxxxxxxxxxxxxxx)
4.   Select the power supply option (page xxxxxxxxx)

COOPER Fire

Section 3

Panel Controls & Indicators

Panel Controls & Indicators

1. System LED's
2. Zonal LED's
3. Touch Screen Display

LED	Name	Function	Action
1	Power On	Shows Panel is On	Check Indicator is Illuminated
2	Fire	Indicators Panel has Detected a Fire	Impliment Fire Action Procedure
3	General Fault	Monitors Devices for Faults e.g. Smoke detectors/Sounders	Report to System Supervisor
4	General Disable	Monitors Fire Panel for Faults	Report Fault to Service Dept
5	Power Fault	Monitor Internal Battery Charger	Report Fault to Service Dept
6	System Fault	Monitors Fire Panel for Faults	Report Fault to Service Dept
7	Test	Supervisor/Engineer is Testing the Systems	Report to System Supervisor
8	Sounder	Indicates the Sounder Status	Check with System Supervisor

COOPER Fire

Touch Screen Display

Supervisor	Fires 0	Pre Alarms 0	Faults 0	Disabled 0

Repeater Panel
System Healthy

Tuesday
dd-mm-yyyy

16:25.25
BST On

The Touch Screen is a multi-function display consisting 320x240 dots featuring high intensity backlighting. In normal operation, the display indicates as above with the backlighting off.

During an event on the system the display shows the FIRST EVENT and LAST EVENT plus other events as space allows.

The last 2 lines are normally used to display the total number of events, but they are also used for scrolling fire conditions, faults, pre alarms or disabled devices independently or for displaying a reduced menu when in fire condition.

When an event occurs the Touch Screen backlighting comes on unless there is a mains power supply fault.
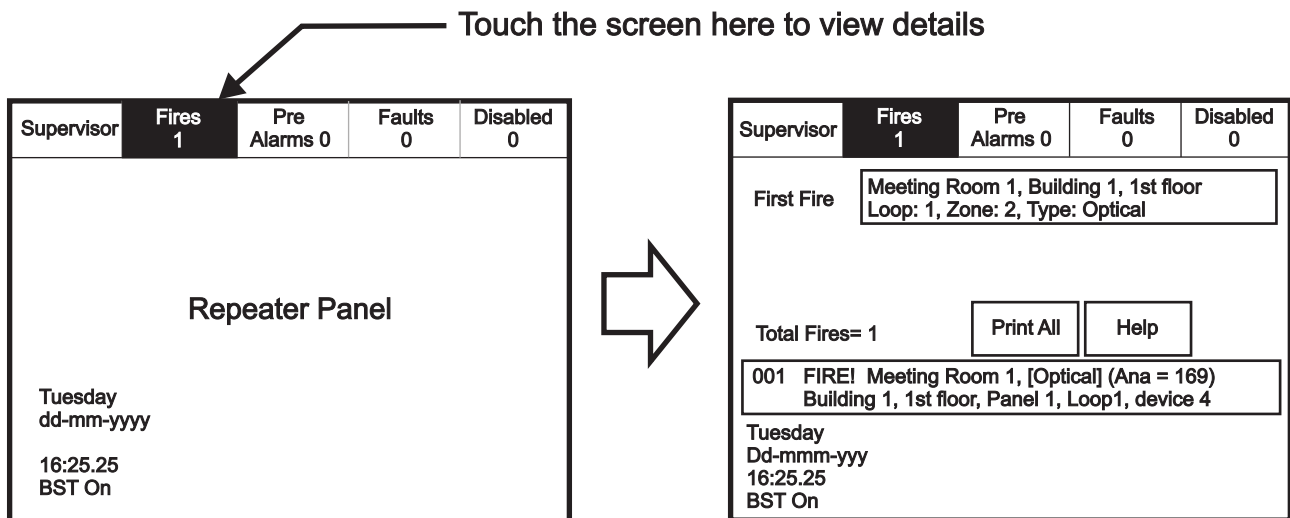
Use the Touch Screen to scroll through all active events on the system by using the SCROLL UP and SCROLL DOWN buttons (available at access level 1). You can display the contents of the log and also view details of any fires, faults, pre-alarms,faults or disablements.. When displaying the system menu on the Touch Screen, the last 5 lines of the display are shown in reverse text.

COOPER Fire

Panel Operation

The Panel is operated via a backlit touch screen. The default fire screen is shown below. From this screen all the panels functions can be operated. The first time you touch the screen the backlight will illuminate the panel.

Supervisor	Fires 0	Pre Alarms 0	Faults 0	Disabled 0

Repeater Panel
System Healthy

Tuesday
dd-mm-yyyy

16:25.25
BST On

Pressing a field will highlight it and forward to the next screen as shown below.

Touch the screen here to view details

Supervisor	Fires 1	Pre Alarms 0	Faults 0	Disabled 0

Repeater Panel

Tuesday
dd-mm-yyyy

16:25.25
BST On

Supervisor	Fires 1	Pre Alarms 0	Faults 0	Disabled 0

First Fire | Meeting Room 1, Building 1, 1st floor
Loop: 1, Zone: 2, Type: Optical

Total Fires= 1   Print All   Help

001   FIRE! Meeting Room 1, [Optical] (Ana = 169)
         Building 1, 1st floor, Panel 1, Loop1, device 4

Tuesday
Dd-mmm-yyy
16:25.25
BST On

COOPER Fire

Public Access Level 1

Public access level does not require an access code and allows anybody to review the functions outlined below.

Public Access Level

Supervisor	Fires 0	Pre Alarms 0	Faults 5	Disabled / Test

Repeater Panel
System Healthy

Tuesday
dd-mm-yyyy

16:25.25
BST On

Supervisor	Fires 1	Pre Alarms 0	Faults 0	Disabled / Test

First Fire | 12:26:23 Device 1, Zone 1
Lp: 1, Ad:1, Z:1, Opto/thermal, [69]

Total Fires= 1 | Print All | Help

Tuesday
dd-mm-yyyy
16:25.25
BST On

Supervisor	Fires 0	Pre Alarms 6	Faults 0	Disabled / Test
Show Addresses	Show Zones	Show I/O	Show Test Zone	

Print All | Help

001	Device 2, Zone 1 Loop 1, Zone: 1, Type : Opto/thermal
002	Device 3, Zone 1 Loop 1, Zone: 1, Type : Opto/thermal
003	Device 4, Zone 1 Loop 1, Zone: 1, Type : Opto/thermal
004	Device 5, Zone 1 Loop 1, Zone: 1, Type : Opto/thermal

Supervisor	Fires 0	Pre Alarms 6	Faults 0	Disabled / Test

Print All | Help

001	03-Jun-03 12:51 Warning! : Device1 Lp: 1, Ad: 1, Z: 1, Opto/thermal [69]
002	03-Jun-03 12:51 Warning! : Device2 Lp: 1, Ad: 2, Z: 1, Opto/thermal [69]
003	03-Jun-03 12:51 Warning! : Device3 Lp: 1, Ad: 3, Z: 1, Opto/thermal [69]
004	03-Jun-03 12:51 Warning! : Device4 Lp: 1, Ad: 4, Z: 1, Opto/thermal [69]
005	03-Jun-03 12:51 Warning! : Device5 Lp: 1, Ad: 5, Z: 1, Opto/thermal [69]

Supervisor	Fires 0	Pre Alarms 6	Faults 5	Disabled / Test

Print All | Help

001	12:31:59 Fault! : Device1 Lp: 1, Ad: 1, Z: 1, Opto/thermal [0]
002	12:32:59 Fault! : Device2 Lp: 1, Ad: 2, Z: 1, Opto/thermal [69]
003	12:33:59 Fault! : Device3 Lp: 1, Ad: 3, Z: 1, Opto/thermal [69]
004	12:34:59 Fault! : Device4 Lp: 1, Ad: 4, Z: 1, Opto/thermal [69]
005	12:35:59 Fault! : Device5 Lp: 1, Ad: 4, Z: 1, Opto/thermal [69]

COOPER Fire

Evacuate (Access Level 2)

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the passcode.

Enter the Supervisor Mode Passcode and select "Evacuate" on the menu at the top of the screen.

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

Others

View Fires
AC = 0 | View Pre Alarms | Disabled | Faults

Pre-alarm = Some smoke/heat but below fire threshold.
Disabled = Detectors, alarms etc that are switched off.
Faults = Short circuits, broken detectors etc.
Others = Enabled/Disabled, printing log, tests etc.

To silence all alarms, touch "Silence Alarms"
To activate all alarms, touch "evacuate".

Select "Yes" to evacuate the building.

This will activate ALL sounders
and activate all panel relays
Do you wish to continue?

Yes	No

COOPER Fire

Silence Alarms
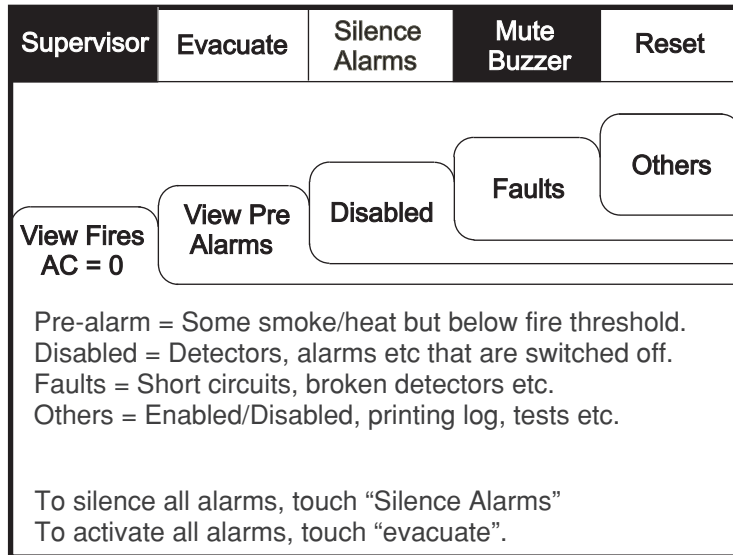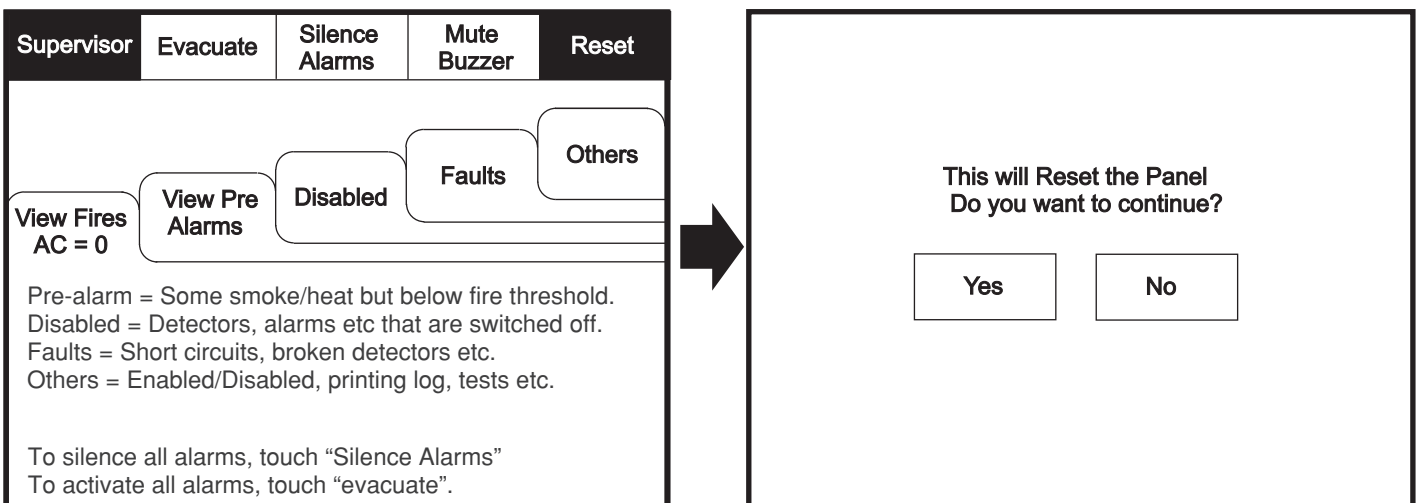
To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the passcode.

Enter the Supervisor Mode Passcode and select "Silence Alarms" button as the top of the screen.

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

Others

View Fires AC = 0 | View Pre Alarms | Disabled | Faults

Pre-alarm = Some smoke/heat but below fire threshold.
Disabled = Detectors, alarms etc that are switched off.
Faults = Short circuits, broken detectors etc.
Others = Enabled/Disabled, printing log, tests etc.

To silence all alarms, touch "Silence Alarms"
To activate all alarms, touch "evacuate".

Select "yes" to silence Alarm.

This will silence ALL sounders
Do you wish to continue?

Yes	No

Mute Buzzer

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the passcode.

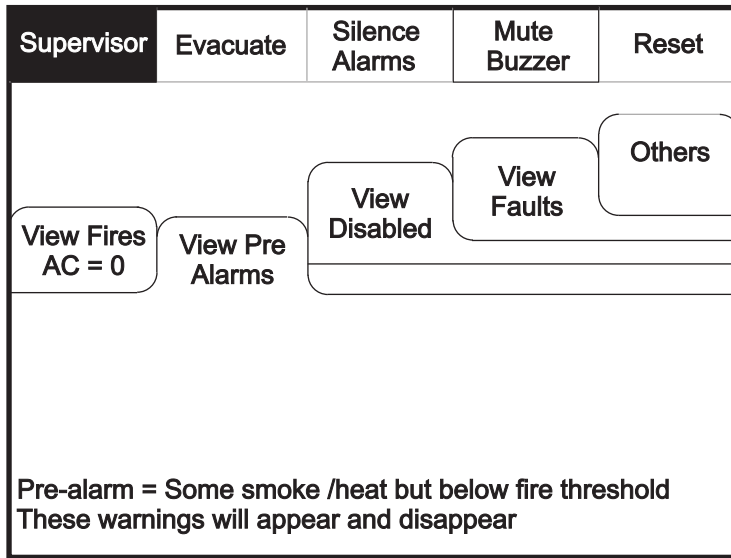Enter the Supervisor Mode and Select "Mute Buzzer" from the Top Menu

| Supervisor | Evacuate | Silence Alarms | Mute Buzzer | Reset |

View Fires AC = 0 — View Pre Alarms — Disabled — Faults — Others

Pre-alarm = Some smoke/heat but below fire threshold.
Disabled = Detectors, alarms etc that are switched off.
Faults = Short circuits, broken detectors etc.
Others = Enabled/Disabled, printing log, tests etc.

To silence all alarms, touch "Silence Alarms"
To activate all alarms, touch "evacuate".

Reset

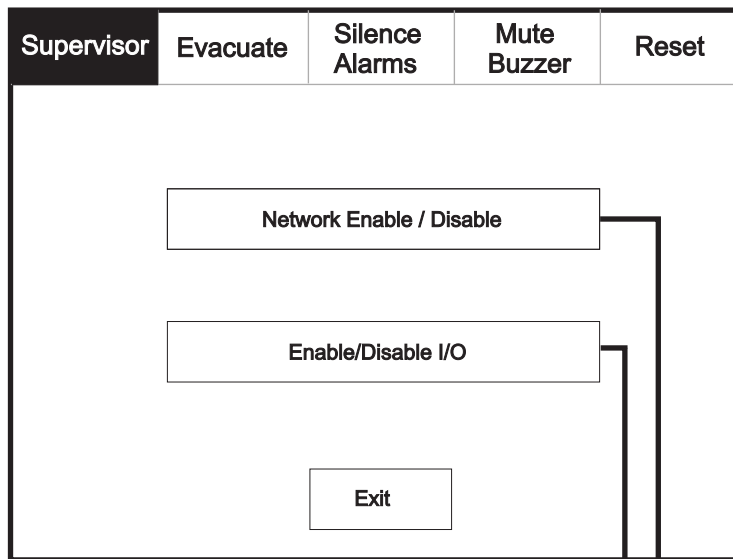Enter the Supervisor Mode and Select "Reset" from the top Menu. Select "Yes" to reset the panel.

| Supervisor | Evacuate | Silence Alarms | Mute Buzzer | Reset |

View Fires AC = 0 — View Pre Alarms — Disabled — Faults — Others

Pre-alarm = Some smoke/heat but below fire threshold.
Disabled = Detectors, alarms etc that are switched off.
Faults = Short circuits, broken detectors etc.
Others = Enabled/Disabled, printing log, tests etc.

To silence all alarms, touch "Silence Alarms"
To activate all alarms, touch "evacuate".

This will Reset the Panel
Do you want to continue?

| Yes | No |

COOPER Fire

Pre-Alarms

Enter the Supervisor Mode and Select "Pre-Alarms" tab.

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

View Fires AC = 0 | View Pre Alarms | View Disabled | View Faults | Others

Pre-alarm = Some smoke /heat but below fire threshold
These warnings will appear and disappear

A pre-alarm is shown when a detector appears to register heat or smoke but in a quantity that is insufficient to warrant an alarm.
Pre-alarm may indicate a build up of dirt in a smoke detector which can be interpreted by the detector as smoke presence.

Disabled Devices

Enter the Supervisor mode and Select the "Disabled" tab.

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

View Fires AC = 0 | View Pre Alarms | View Disabled | View Faults | Others

I/O	Zone: 0

Addresses: 0

Touch button to
View list
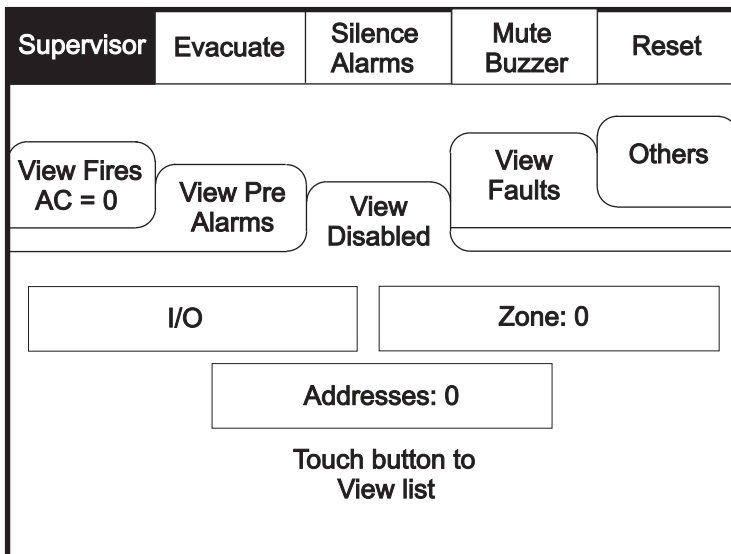
The individual buttons show which devices and the number of devices which have been disabled. Press one of the buttons to display detailed information for a particular category

COOPER Fire

Faults

Enter Supervisor Mode Passcode and select "Faults" tab.

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

View Fires AC = 0   View Pre Alarms   View Disabled   View Faults   Others

Pre-alarm = Some smoke /heat but below fire threshold
These warnings will appear and disappear
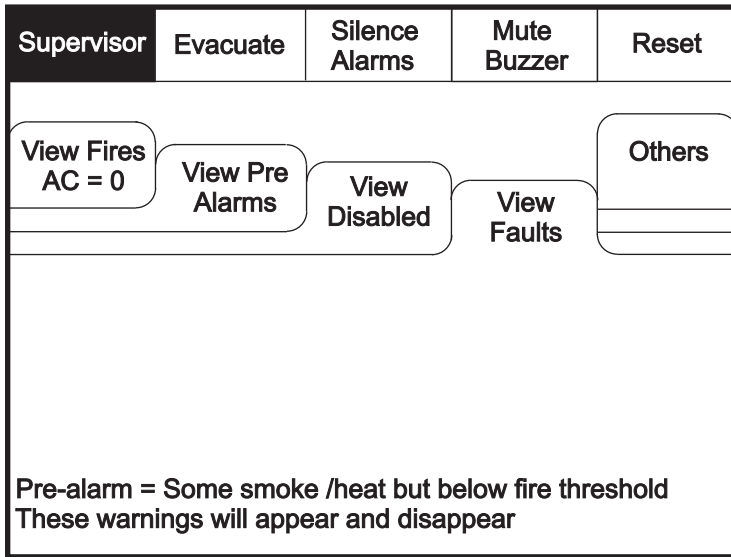
Enable/Disable (others Menu)

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the passcode.

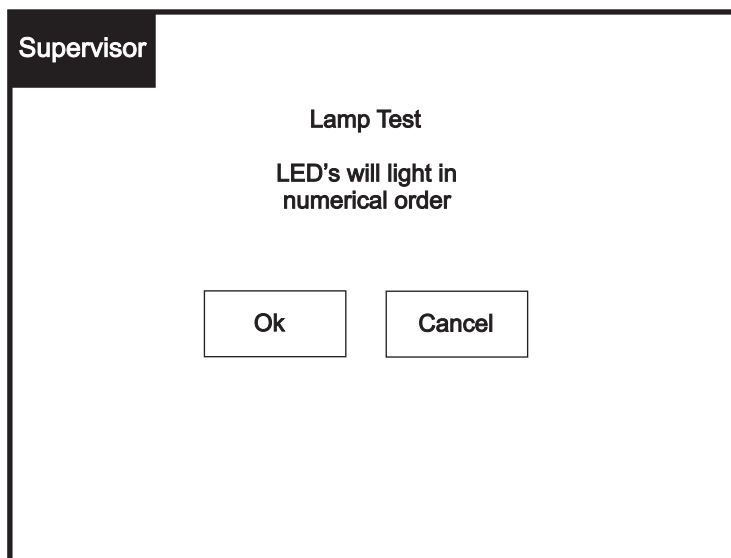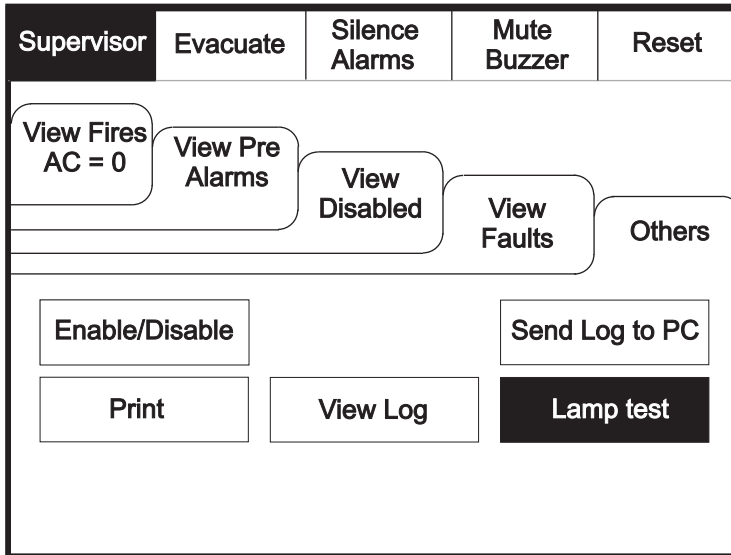Enter the Supervisor Mode passcode and select the "Others" tab.

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

View Fires AC = 0   View Pre Alarms   View Disabled   View Faults   Others

Enable/Disable		Send Log to PC
Print	View Log	Lamp test

COOPER Fire

Enable/Disable

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

Network Enable / Disable

Enable/Disable I/O

Exit
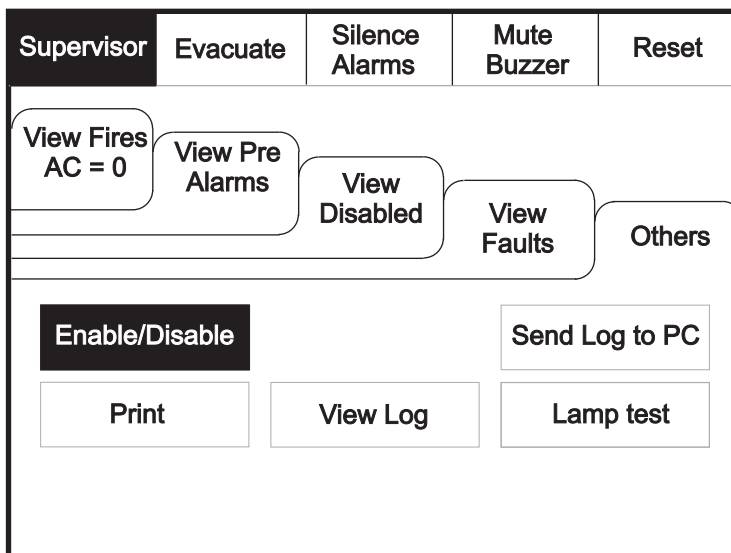
The Enable/Disable feature allows the operator to disable part or a whole system by the sub menus shown on the left.

Supervisor	EXIT	NETWORK ENABLE / DISABLE

PANEL NUMBER

0	1	2	3
Del	4	5	6
Ok	7	8	9

Enable all Devices?
Do you want to continue?

Yes	No

COOPER Fire
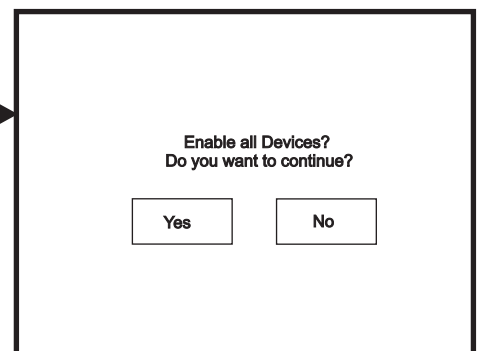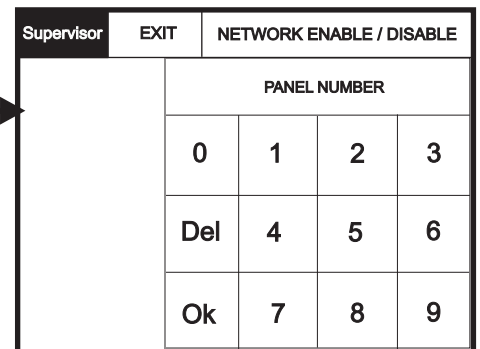
Print (function not availible)

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the passcode.

Enter the Supervisor Mode and Select the "Others" Tab. Press "Print"

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

View Fires AC = 0   View Pre Alarms   View Disabled   View Faults   Others

Enable/Disable   Send Log to PC

Print   View Log   Lamp test
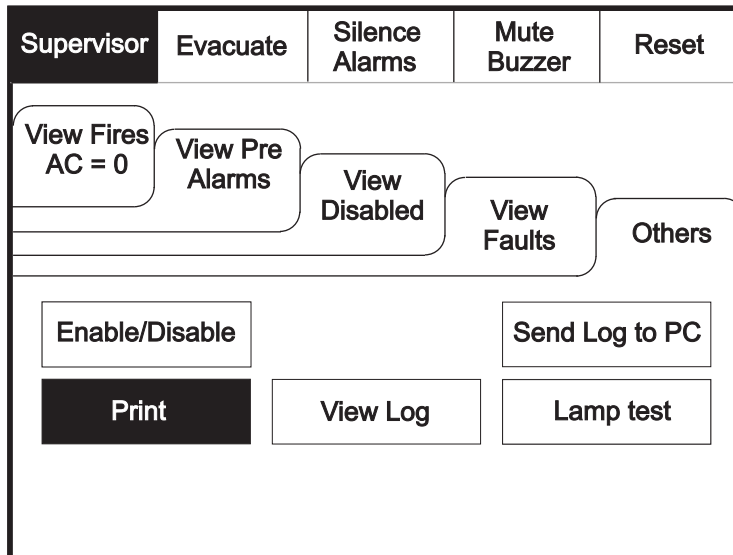
Select the Information You wish to Print from the Buttons Listed.

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

Print All Log Records   Print Fire Log

Print Last 10 Log Records   Print Fault Log

Print Disablements   Print Test Log

Print Current Faults

Print Current Fires   Exit

COOPER Fire
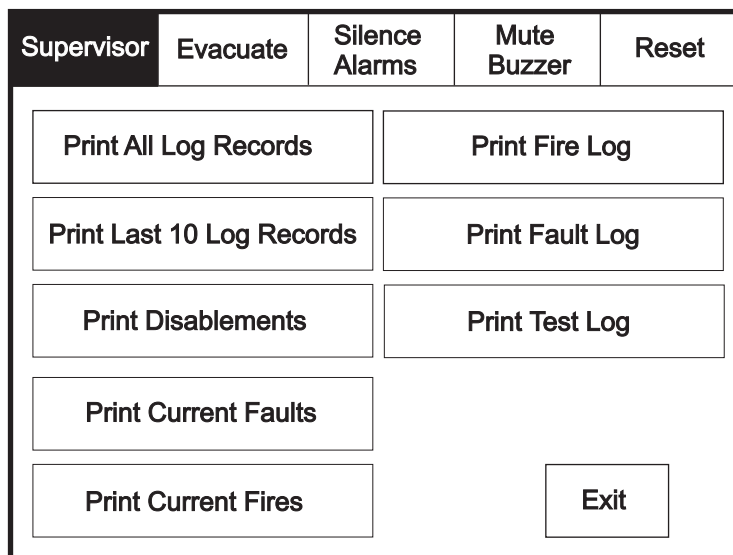
Lamp Test

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the passcode.

Enter the Supervisor Mode and Select the "Others" Tab. Press "Lamp Test"

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

View Fires AC = 0 · View Pre Alarms · View Disabled · View Faults · Others

Enable/Disable   Send Log to PC

Print   View Log   Lamp test

Supervisor

Lamp Test

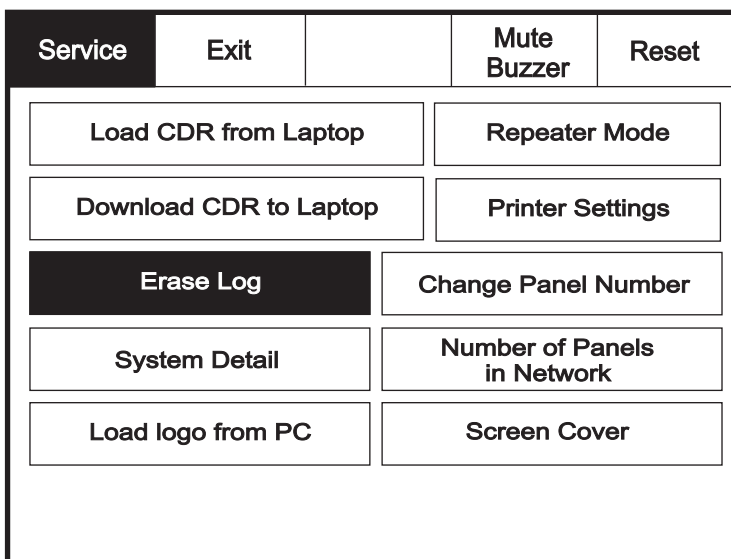LED's will light in numerical order

Ok   Cancel

Viewing Events

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the passcode.

Enter the Supervisor Mode Passcode. Select the "Others" tab and press View Log.
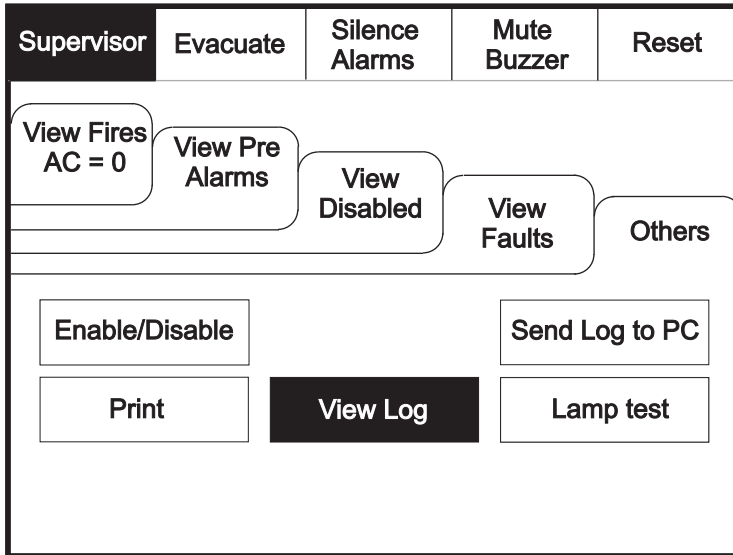
Use the scroll bar to view the list of upto 1000 events.
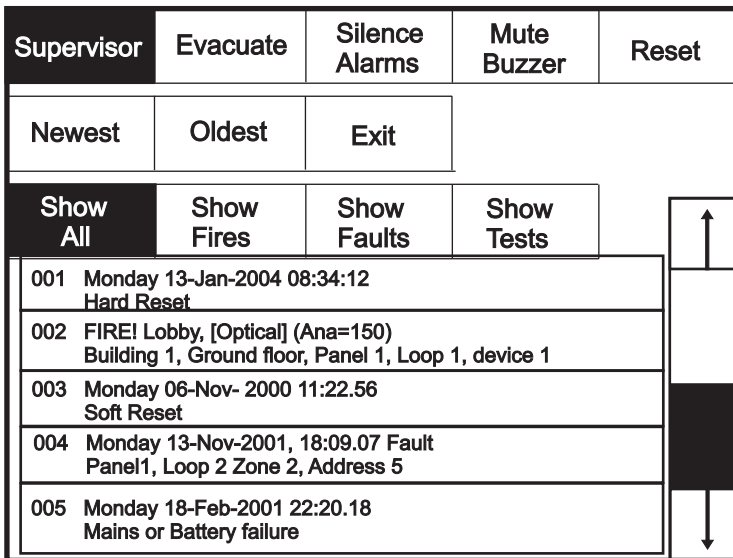
Events can be sorted by selecting from the sort option menu.

The Panel event log stores up to 1000 events including, fires, faults, resets and address changes. Once the maximum 1000 events has been reached Panel will automatically overwrite the oldest event every time a new event is stored. The event log can only be reset by an approved service engineer.

COOPER Fire

31

Send Log to PC

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the passcode.

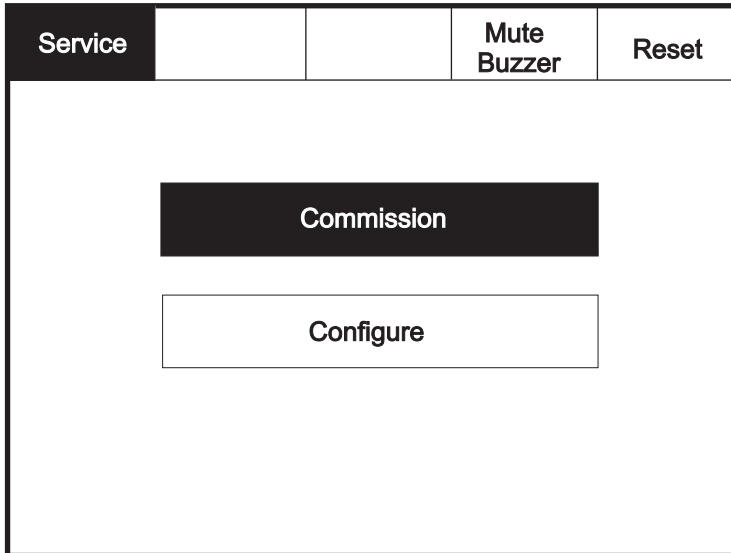Enter the Supervisor Mode and Select the "Others" Tab. Press Send Log to PC.
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

Supervisor	Evacuate	Silence Alarms	Mute Buzzer	Reset

View Fires AC = 0

View Pre Alarms

View Disabled

View Faults

Others

Enable/Disable

Send Log to PC

Print

View Log

Lamp test

Cancel	Send Log to PC

Waiting for PC...

COOPER Fire
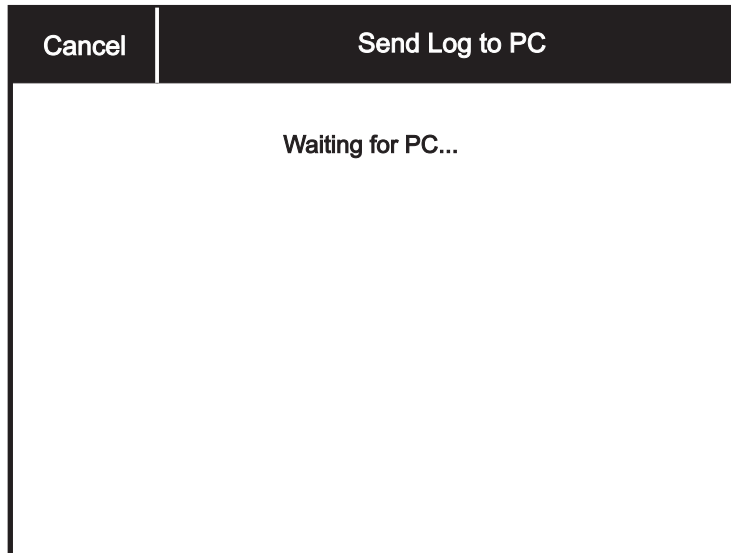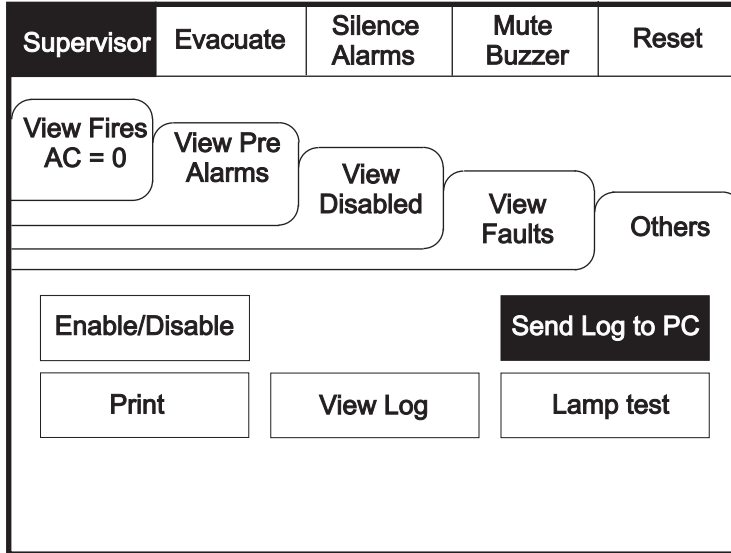
Erase Log

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the service passcode.

Enter the Service Mode and Select Commission.

Service			Mute Buzzer	Reset

Commission

Configure

Service	Exit		Mute Buzzer	Reset

Load CDR from Laptop	Repeater Mode
Download CDR to Laptop	Printer Settings
Erase Log	Change Panel Number
System Detail	Number of Panels in Network
Load logo from PC	Screen Cover

Select "Erase Log and Reset" from the Configure Menu Screen.

This will delete all log entries
Do you want to continue

Yes	No

System Details
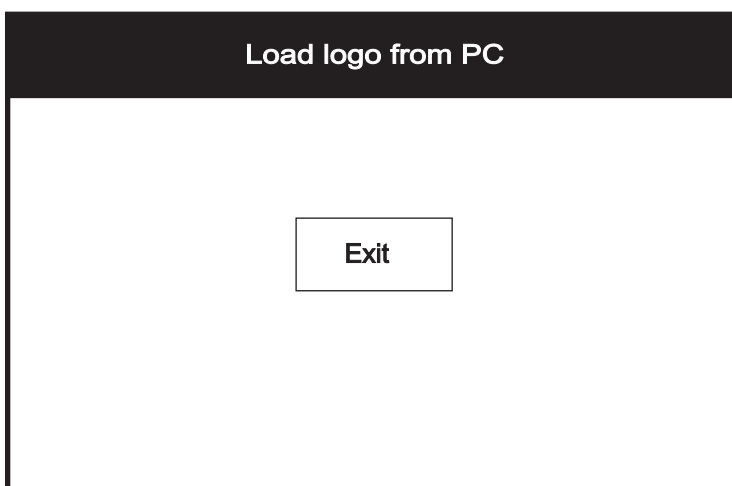
To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the service passcode.

Enter the Service Mode and Select Commission, then Press "System Details".

Service			Mute Buzzer	Reset

Commission

Configure

Service	Exit		Mute Buzzer	Reset

Load CDR from Laptop	Repeater Mode
Download CDR to Laptop	Printer Settings
Erase Log	Change Panel Number
System Detail	Number of Panels in Network
Load logo from PC	Screen Cover

Service FRE off	Print	Exit		Reset

Program	V0.00.15
Program Data	09-Mar-2004
Program Checksum	0xAA95524
CDR	V0.5
CDR Checksum	0xF7D95E
Loop Controller 1	V0.0.0
Loop Controller 2	V0.0.0
Panel Number	0
Total Panels	1
Total Zones	4

COOPER Fire

Load Logo from PC

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the service passcode.

Enter the Service Mode and Select Commission.

Service			Mute Buzzer	Reset

Commission

Configure

Service	Exit		Mute Buzzer	Reset

Load CDR from Laptop	Repeater Mode
Download CDR to Laptop	Printer Settings
Erase Log	Change Panel Number
System Detail	Number of Panels in Network
Load logo from PC	Screen Cover
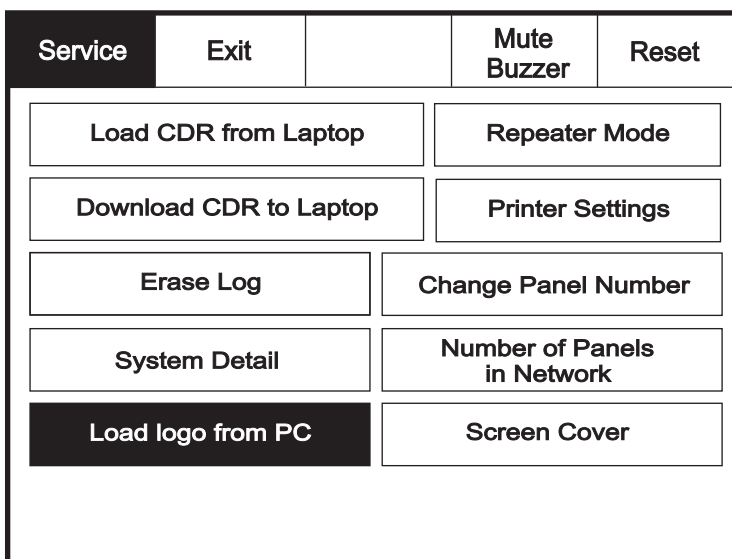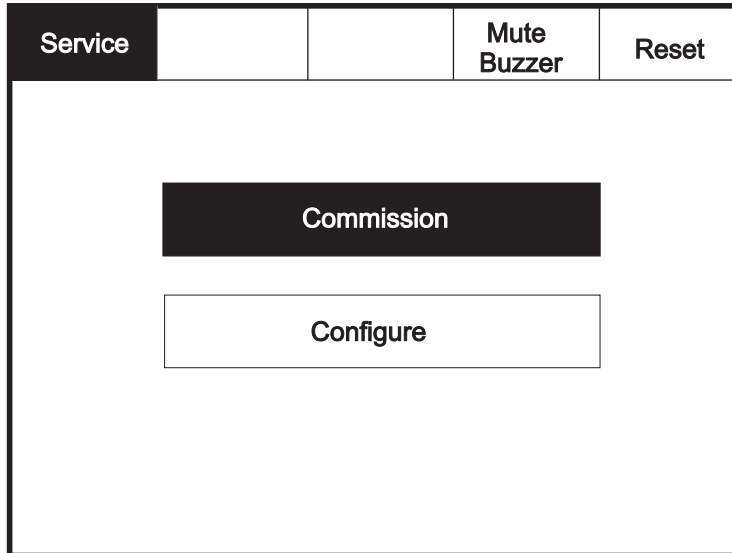
Select "Load logo from PC" from the Configure Menu Screen.

Load logo from PC

Exit

Repeater Mode

The Repeater can be set as active or passive. Unlike the active repeater, the passive repeater will only display information, no action from the repeater is transfered to the network.

Enter the Service Mode and Select Commission.

Service			Mute Buzzer	Reset

Commission

Configure

Service	Exit		Mute Buzzer	Reset

Load CDR from Laptop	**Repeater Mode**
Download CDR to Laptop	Printer Settings
Erase Log	Change Panel Number
System Detail	Number of Panels in Network
Load logo from PC	Screen Cover

Press "Repeater Mode"

Service	Exit			Reset

Active

Passive

Select "Active" for an active repeater or "Passive" for a passive repeater

Printer Settings

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the service passcode.
Enter the Service Mode and Select Commission then press "Printer settings".

Service			Mute Buzzer	Reset
		Commission		
		Configure		

Service	Exit		Mute Buzzer	Reset
Load CDR from Laptop			Repeater Mode	
Download CDR to Laptop			**Printer Settings**	
Erase Log			Change Panel Number	
System Detail			Number of Panels in Network	
Load logo from PC			Screen Cover	

Service	Exit			Reset
		Auto		
		Request		

COOPER Fire

Change Panel Number

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the service passcode.

Enter the Service Mode and Select Commission then press "Change Panel Number"

Service			Mute Buzzer	Reset

Commission

Configure

Service	Exit		Mute Buzzer	Reset

Load CDR from Laptop	Repeater Mode
Download CDR to Laptop	Printer Settings
Erase Log	**Change Panel Number**
System Detail	Number of Panels in Network
Load logo from PC	Screen Cover

Change Panel Number

0 ....

1	2	3
4	5	6
7	8	9
ok	0	←

Cancel

COOPER Fire

Number of Panels in Network

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the service passcode.

Enter the Service Mode and Select Commission then press "Number of Panels in

Service			Mute Buzzer	Reset

Commission

Configure

Service	Exit		Mute Buzzer	Reset

Load CDR from Laptop	Repeater Mode
Download CDR to Laptop	Printer Settings
Erase Log	Change Panel Number
System Detail	**Number of Panels in Network**
Load logo from PC	Screen Cover

Change Panel Number

0
....

1	2	3
4	5	6
7	8	9
ok	0	←

Cancel

COOPER Fire

Change Date/Time

Enter the Service Mode and Select Configure. Select Change Date/Time.

Service			Mute Buzzer	Reset

Commission

Configure

Service	Exit		Mute Buzzer	Reset

Change Date/Time	Add/Delete Zone
Change Password	Network
Relay Control	Language
Programmable Input	Network Protocol
	Power Supply

Set the Time Using the Buttons Shown Below.

Service	Ok	Cancel		Reset

Current Time:

10:16:12

+1 Hour	+10 Mins	+1 Mins
-1 Hour	-10 Mins	-1 Mins

BST On

Current Date:

+1 Day	+1 Month	+1 Year
-1 Day	-1 Month	-1 Year

Wednesday
dd-mmm-yyyy

COOPER Fire

Change Panel Text

Enter the Service Mode and Select Configure. Select "Change Text"

Service	Exit		Mute Buzzer	Reset

Change Date/Time	Add/Delete Zone
Change Text	Network
Configure Zones	Language
Change Password	Network Protocol
Relay Control	Power Supply
Programmable Input	

Press "Change Panel Text"

Service	Exit		Mute Buzzer	Reset

Change Panel Text

Correct Panel Text

CF1100 ←

1	2	3	4	5	6	7	8	9	0
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
CAPS	Z	X	C	V	B	N	M	,	.
OTHER	SPACE		OK	CANCEL

COOPER Fire

Change Passcode

Enter the Service Mode and Select Configure. Select "Change User Code"

Service	Exit		Mute Buzzer	Reset

Change Date/Time	Add/Delete Zone
Change Text	Network
Configure Zones	Language
Change Password	Network Protocol
Relay Control	Power Supply
Programmable Input	

Please enter Passcode:

....

New Code:

....

Verify New Code:

....

Cancel

1	2	3
4	5	6
7	8	9
ok	0	←

Passcode is not correct.
No change made

Ok

Verification is incorrect
No change made

Ok

New Password accepted
Saved

Ok

COOPER Fire
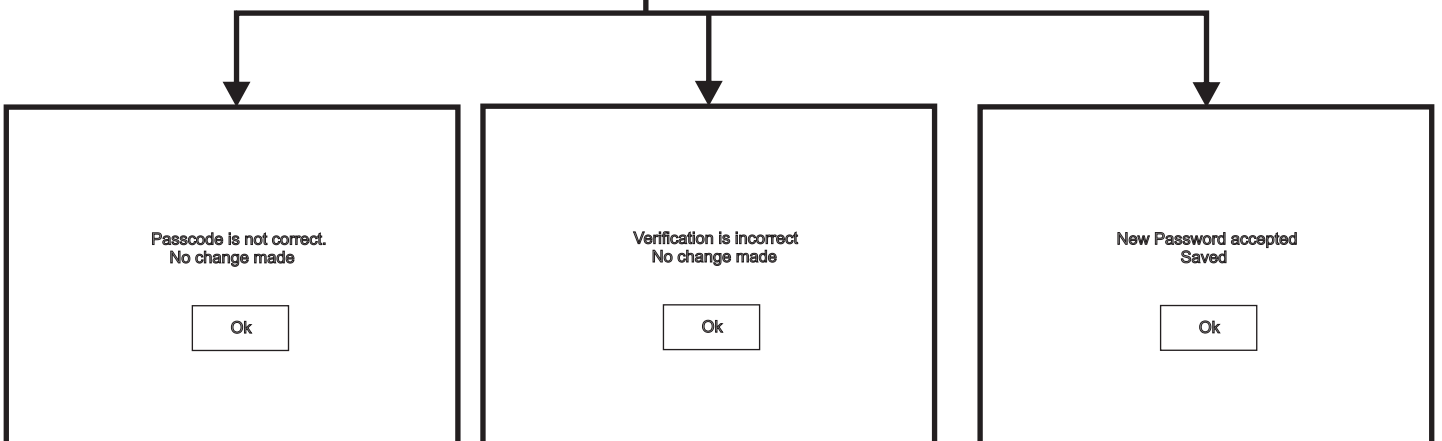
Relay Control

The repeater is equipped with 2 programable relays configured as volt free contact.
Enter the Service Mode and Select Configure. Select "Relay Control"

Service	Exit		Mute Buzzer	Reset

Change Date/Time	Add/Delete Zone
Change Text	Network
Configure Zones	Language
Change Password	Network Protocol
Relay Control	Power Supply
Programmable Input	

Select the type of relay either "Aux Relay" or "Fault Relay"

Service	Exit		Mute Buzzer	Reset

Aux Relay

Fault Relay

Service	Exit		Mute Buzzer	Reset

Aux Relay

Fault Relay

Select the desired mode

Service	Exit		Mute Buzzer	Reset

On Fire
On Pre-Alarm
On Fault
On Test
On Disablement
Not Required

COOPER Fire

Programmable Input

The Repeater is equipped with a programable input which can operate across the network if the repeater is programmed as active.
Enter the Service Mode and Select Configure. Select "Programmable Input"

Service	Exit		Mute Buzzer	Reset

Change Date/Time	Add/Delete Zone
Change Text	Network
Configure Zones	Language
Change Password	Network Protocol
Relay Control	Power Supply
Programmable Input	

Select Zone into which device will be added

Service	Exit		Mute Buzzer	Reset

Reset	Fire
Evacuate	Pre-Alarm
Silence	Fault
Not Required	Prog Input Text

Select the mode of operation from the menu

Network

Enter the Service Mode and Select Configure. Select "Network", This menu defines whether messages are broadcast across the network or remain local.

Service	Exit		Mute Buzzer	Reset

Change Date/Time	Add/Delete Zone
Change Text	**Network**
Configure Zones	Language
Change Password	Network Protocol
Relay Control	Power Supply
Programmable Input	

Select the specific required . E.g "Reset"

Service	Exit	Receive message over network

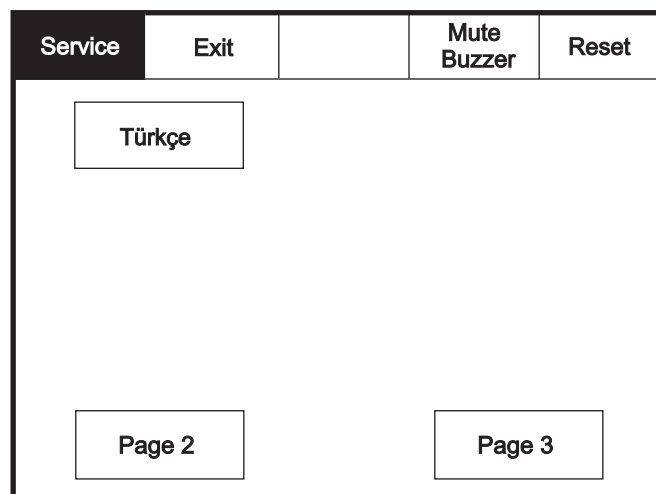|	
Reset	**Network**
Evacuate	Network
Silence	Network
Fire	Network
Fault	Network
Pre-Alarm	Network

Select if Network is required to be on/off

Service	Exit	Receive message over network

Reset	**Not Required**
Evacuate	Network
Silence	Network
Fire	Network
Fault	Network
Pre-Alarm	Network

COOPER Fire

45

Language

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the service passcode.

Enter the Service Mode and Select Configure.

Service			Mute Buzzer	Reset

Commission

Configure

Service	Exit		Mute Buzzer	Reset

Change Date/Time	Add/Delete Zone
Change Text	Network
Configure Zones	**Language**
Change Password	Network Protocol
Relay Control	Power Supply
Programmable Input	

Service	Exit		Mute Buzzer	Reset

English	Français	Deutsch
Nederlands	Italiano	Português
Nederlands(BE)	Chinese	Cesky
Dansk	Slovensky	Magyar
Page 2		Page 3

Service	Exit		Mute Buzzer	Reset

Slovenski	Polski	Latviesu
Hrvatski	Espanol	Svenska
Russian	Greek	Viêt
Eeesti	Afrikaans	Suomi
Page 1		Page 3

Service	Exit		Mute Buzzer	Reset

Türkçe

Page 2	Page 3

Select "Language" from the Configure Menu Screen.

Then press select required language from the 3 available pages.

COOPER Fire

Network Protocol

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the service passcode.

Enter the Service Mode and Select Configure.

Service	Exit		Mute Buzzer	Reset

Change Date/Time	Add/Delete Zone
Change Text	Network
Configure Zones	Language
Change Password	**Network Protocol**
Relay Control	Power Supply
Programmable Input	

Service	Exit			Reset

Network Protocol V1

Network Protocol V2

COOPER Fire

Power Supply

To activate the touch screen, touch the top left corner of the screen until the screen illuminates. To enter the supervisor mode touch the supervisor button and enter the service passcode.

Enter the Service Mode and Select Configure.

Service	Exit		Mute Buzzer	Reset

Change Date/Time	Add/Delete Zone
Change Text	Network
Configure Zones	Language
Change Password	Network Protocol
Relay Control	**Power Supply**
Programmable Input	

Service	Exit			Reset

Internal Power

External Power

COOPER Fire

Password Protection

Please enter Passcode	1	2	3
	4	5	6
	7	8	9
	ok	0	←

The system has password protection which restricts access to the DISABLE Menu and to TEST/COMMISSIONING MODE. The password is a four digit code and the default number is 2214. The password entry screen is accessed via the supervisor mode button. Press supervisor mode and the password entry screen will be displayed, type in the passcode and press Ok. If the wrong password is entered three times further access to the system is denied.
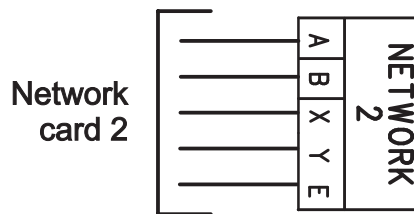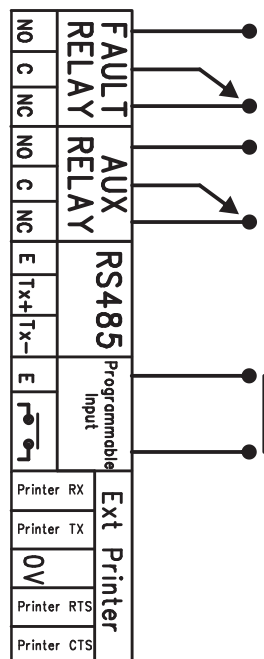
Section 4

Appendix

COOPER Fire

System Wiring

MAINS
L
N
E

+24V IN
+
−

+24V OUT
+
−

NETWORK 1
A
B
X
Y
E

Network card 1
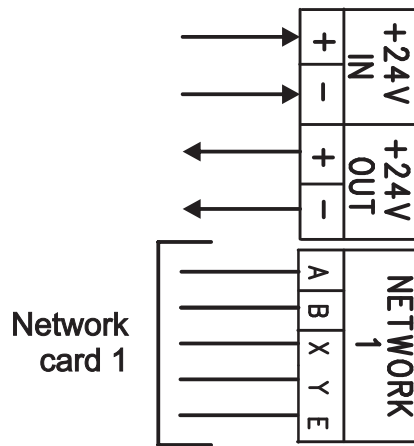
Use Network 1 for standard network

Use both Network 1 & 2 for Dual Network

NETWORK 2
A
B
X
Y
E

Network card 2

FAULT RELAY
NO
C
NC

AUX RELAY
NO
C
NC

RS485
E
Tx+
Tx−

Programmable Input
E

Switch / contactor, timer etc. (apply no voltage)

Ext Printer
Printer RX
Printer TX
0V
Printer RTS
Printer CTS